


SEDEX Low Temperature Evaporative Light Scattering Detector

SAMPLE: PARAFILM

SFC

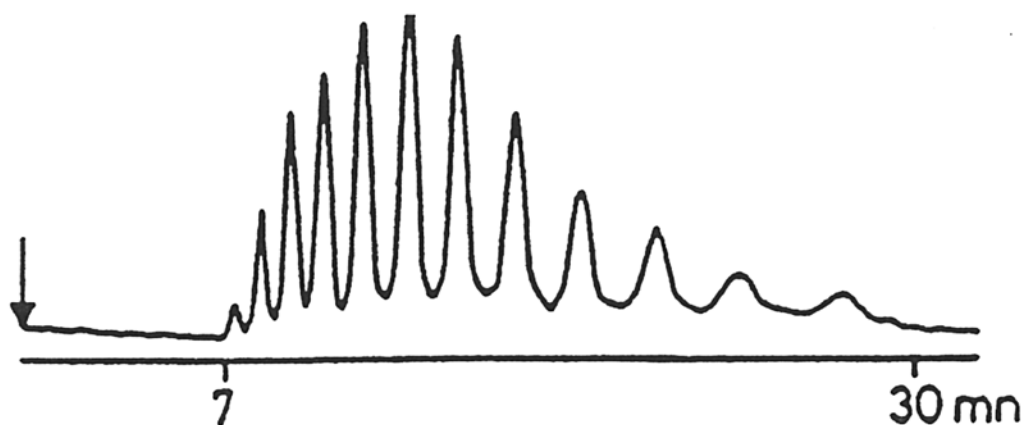

CONDITIONS

Column	<i>Zorbax ODS 250 x 4.6 mm</i>
Injected Volume	<i>20 µl</i>
Eluent	<i>CO₂</i>
Flow Rate	<i>1.5 ml/min</i>
Pressure	<i>150 bars</i>
Temperature	<i>Detector 40° C. Column 40° C</i>

Analyzed by : LCBA 45100 Orleans FRANCE [J. Chromatogr.404 (1987) 95]