


SEDEX Low Temperature Evaporative Light Scattering Detector

INORGANIC CATIONS

HPLC

SAMPLE : Standards

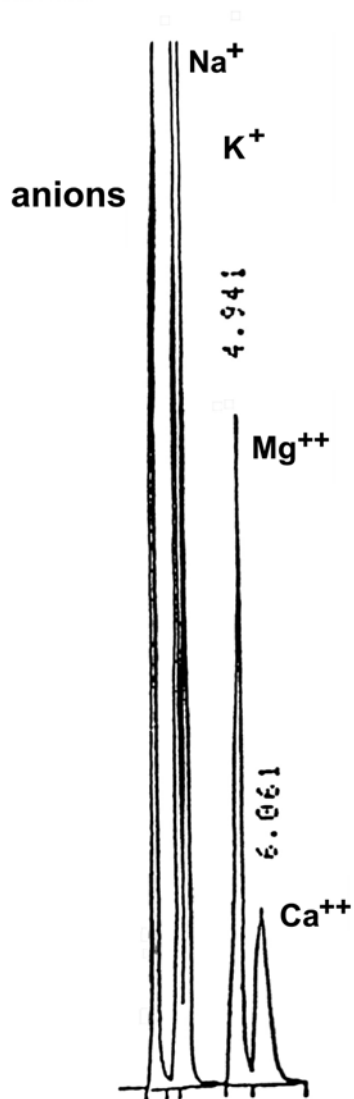

Stationary phase : SCX
Mobile phase : HCOOH/NH₄OH 100/87.6 mM
flow rate : 1 ml/min

CONDITIONS

Pressure	2 bars
Gas	Air
Gain	10
Temperature	45°C

Analyzed by : LCBA 45100 Orléans FRANCE

S.E.D.E.R.E.
PARC VOLTA - BP 27
9, rue Parmentier
94141 Alfortville Cedex FRANCE

Application # 111